




GO TO PRODUCT

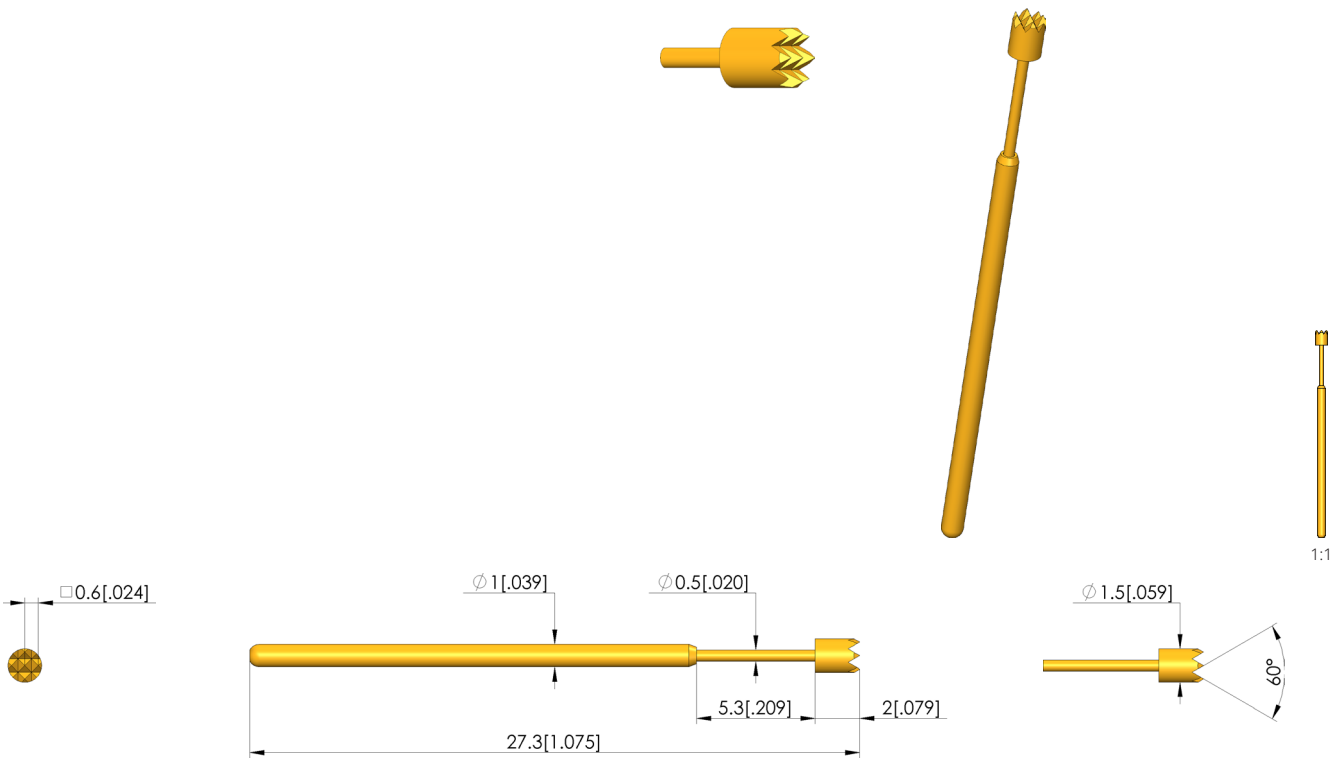

General data

Product group:
 Sub-product group:
 Series:
 Grid:
 Contacting from:
 Magnetic:
 Installation type:
 Quick-exchange system:
 Adjustable installation height:
 Non-rotating:
 Compatible receptacle(s):
 Min. temperature:
 Max. temperature:
 RoHS-compliant:

ICT / FCT (in-circuit test and function test)
 Short/robust GKS
 GKS-101
 1.91 mm [75.1 mil]
 Post
 Yes
 Plug-in
 Yes
 No
 No
 KS-101
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style: 06 serrated
 Tip diameter: 1.5 mm [.059 in]
 Tip style surface: A gold
 Tip style material: 3 CuBe

Electrical data

Current load capacity / rated current: 4 A
 Typical resistance (Ri): 20 mOhm

Mechanical data

Total length: 27.3 mm [1.07 in]
 Barrel diameter: 1 mm [.039 in]
 Maximum stroke: 5.3 mm [.208 in]
 Spring pre-load: 0.27 N [.971 ozf]
 Collar height: 00
 Spring force at working stroke: 0.8 N [2.87 ozf]
 Recommended working stroke: 4 mm [.157 in]

Test Probe

GKS-101 306 150 A 0800


Item GKS-101-0024



GO TO PRODUCT

ingun®

Partner for Future Technology

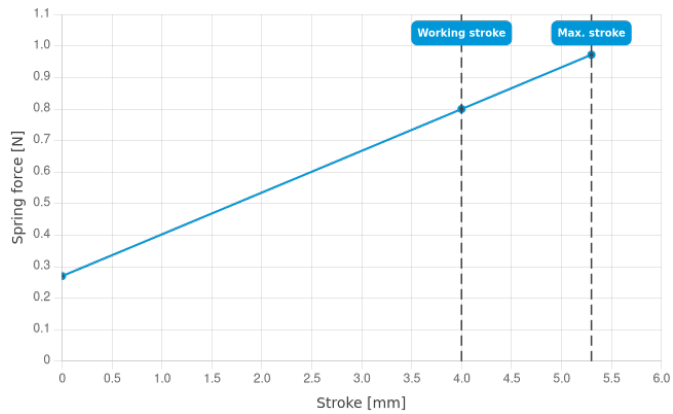

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
ICT/FCT Test probes



ingun.com