




GO TO PRODUCT

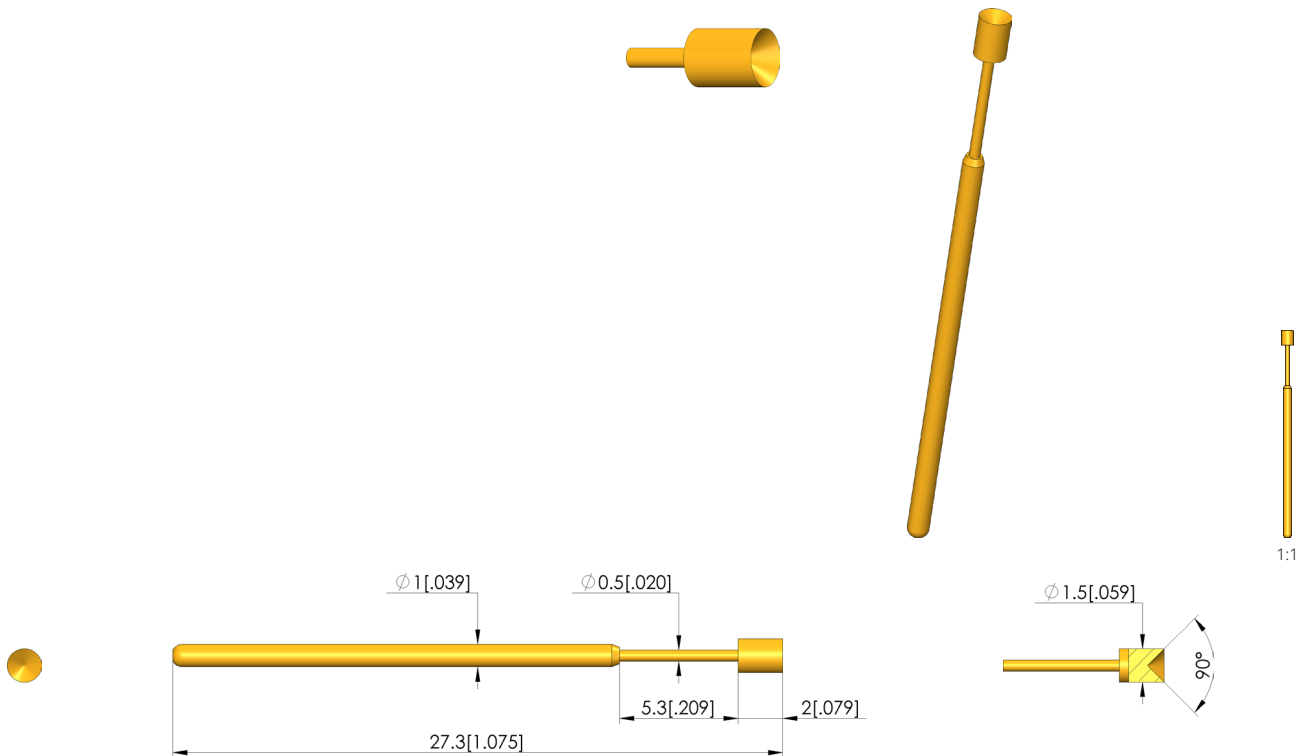

**General data**

Product group: ICT / FCT (in-circuit test and function test)  
 Sub-product group: Short/robust GKS  
 Series: GKS-101  
 Grid: 1.91 mm [75.1 mil]  
 Contacting from: Post  
 Magnetic: Yes  
 Installation type: Plug-in  
 Quick-exchange system: Yes  
 Adjustable installation height: No  
 Non-rotating: No  
 Compatible receptacle(s): KS-101  
 Min. temperature: -40 °C [-40 °F]  
 Max. temperature: 80 °C [176 °F]  
 RoHS-compliant: Yes

Product group: ICT / FCT (in-circuit test and function test)  
 Sub-product group: Short/robust GKS  
 Series: GKS-101  
 Grid: 1.91 mm [75.1 mil]  
 Contacting from: Post  
 Magnetic: Yes  
 Installation type: Plug-in  
 Quick-exchange system: Yes  
 Adjustable installation height: No  
 Non-rotating: No  
 Compatible receptacle(s): KS-101  
 Min. temperature: -40 °C [-40 °F]  
 Max. temperature: 80 °C [176 °F]  
 RoHS-compliant: Yes

**Tip style data**

Tip style: 03 inverse cone  
 Tip diameter: 1.5 mm [.059 in]  
 Tip style surface: A gold  
 Tip style material: 3 CuBe

**Electrical data**

Current load capacity / rated current: 4 A  
 Typical resistance (Ri): 20 mOhm

**Mechanical data**

Total length: 27.3 mm [1.07 in]  
 Barrel diameter: 1 mm [.039 in]  
 Maximum stroke: 5.3 mm [.208 in]  
 Spring pre-load: 0.27 N [.971 ozf]  
 Collar height: 00  
 Spring force at working stroke: 0.8 N [2.87 ozf]  
 Recommended working stroke: 4 mm [.157 in]

# Test Probe


## GKS-101 303 150 A 0800

Item GKS-101-0014



**ingun**<sup>®</sup>

Partner for Future Technology

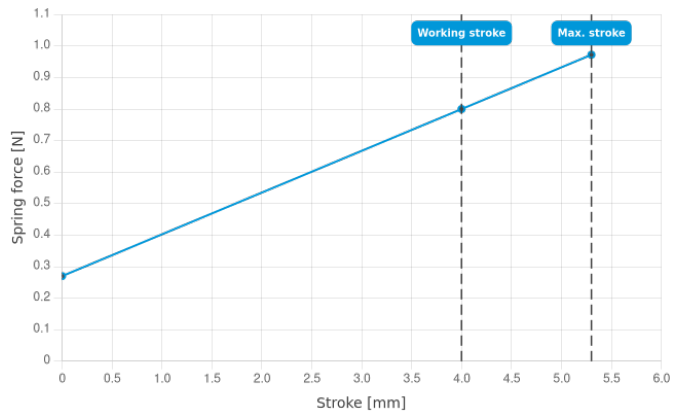

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB

Learn more about  
ICT/FCT Test probes



ingun.com