

# Spare part kit, RF seal ETK-MSD-ATSMA13/HF

Item 113479



GO TO PRODUCT


**ingun**<sup>®</sup>

Partner for Future Technology

- Spare parts kit for quick, reliable and preventive maintenance
- Easy exchange on site


## Application

Spare parts are required as part of preventive maintenance or as soon as components wear out during normal operation and need to be replaced. The RF seals are inserted into the grooves provided for this purpose. The grooves must be degreased before fitting the seal. We recommend wearing gloves when replacing the RF seals.



### Note:

The RF seals have a typical service life of approximately 100,000 load cycles (laboratory conditions). No wear that would restrict the mechanical function of the RF seals was detected in the endurance test.

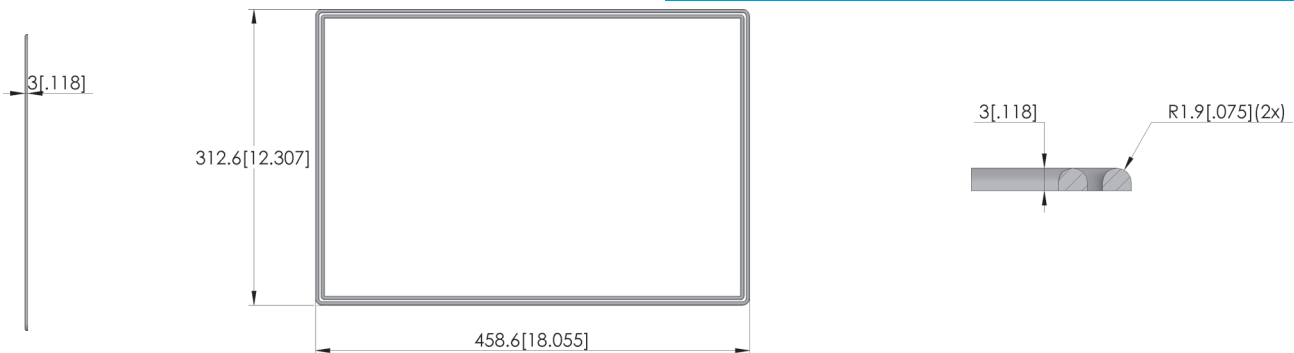

## General data

Product group:	Spare part kits
Series:	ETK-ATSMAXx
Type:	RF seal
Version:	Electrically conductive foam
Accessory type:	Spare parts
Scope of delivery:	Unassembled
Width:	312.6 mm [12.3 in]
Weight:	0.09 kg [.198 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

## Compatible with

Exchangeable kits version:	HF, ESD
MA exchangeable kits (ATS MA):	ATS MA13/(S-10)/HF/AL/ESD

## Technical data

Length:	458.6 mm [18 in]
---------	------------------


# Spare part kit, RF seal ETK-MSD-ATSMA13/HF

Item 113479



**ingun**<sup>®</sup>

Partner for Future Technology

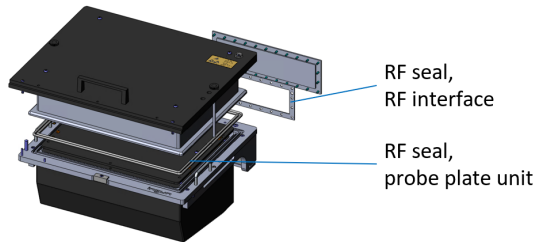

## Radio-frequency exchangeable kits

Part no.	Designation	Version
154013	ATS MA13/HF/AL/ESD	Radio-frequency exchangeable kit without internal interface
154113	ATS MA13/S-10/HF/AL/ESD	Radio-frequency exchangeable kit with internal interface

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB

Learn more about  
Test fixture kits

