

Exchangeable kit

ATS MA13/S-10/KONRAD

Item 59640




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Quick, tool-free set-up, can be used without readjustment
- Available in standard, ESD, and RF versions, with or without internal interface
- Modularly configurable signal transmission with internal interfaces
- Pressure plate unit and probe plate unit can be screwed together with stacking screws to form a unit with protected probe field
- Robust, durable design
- Can be customised using functional units for individual configurations
- Detailed accompanying documents (e.g., customising guidelines)

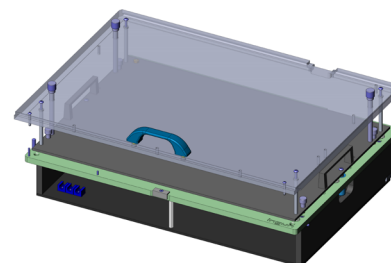

General data

Product group:	ATS manual test fixture (MA)
Subseries:	ATS MAxx
Series:	ATS MA13
Version:	With interface, KONRAD
Scope of delivery:	Assembled
Max. interface signals:	1700
Interface blocks required:	Device under test (DUT) side
Max. internal interface blocks:	10
Internal interface:	Available
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Test systems: KONRAD LEON TINY

Technical data

Pushrod length:	60 mm [2.36 in]
Test probe installation height, top:	16 mm [.629 in]
Test probe installation height, bottom:	10.5 mm [.413 in]
Test probe installation height, dual-stage, bottom:	16 mm [.629 in]
Free space above PCB:	58 mm [2.28 in]
Useable area (WxD):	440 x 310 mm [17.3 x 12.2 in]
Outer dimensionS (WxDxH):	506 x 383 x 202 mm [19.9 x 15 x 7.95 in]


Exchangeable kit ATS MA13/S-10/KONRAD

Item 59640



ingun[®]

Partner for Future Technology

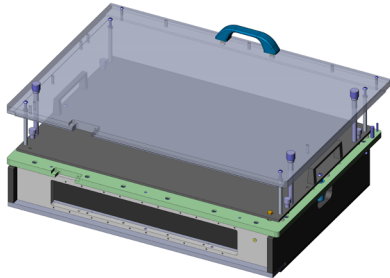

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
MA exchangeable kits



[ingun.com](https://www.ingun.com)